

THICK COPPER ZONES INTERSECTED AT BINDI HINGE ZONE

HIGHLIGHTS

- **New results from core hole 18CADD005 have confirmed thick, higher-grade copper zones at the Bindi Hinge zone, including:**
 - **34m @ 0.55% Cu from 64m; and**
 - **58m @ 0.54% Cu from 150m, including 26m @ 0.69% Cu from 182m.**
- **New results show significantly wider zones and higher grades than previously modelled.**
- **Multi-domain geology model for Bindi West now confirmed over a strike distance >1.6km.**
- **Continuity of new geology model has increased confidence that sufficient tonnages may exist for higher grade startup project.**
- **Updated Resource Model to be completed in early 2019.**

Caravel Minerals (ASX: CVV, Caravel or Company) is pleased to announce further assay results from the recently completed 6-hole diamond drilling program at the Caravel Copper Project (**Figure 1**). The drill holes targeted high grade domains and are part of a work program commenced by the Company in July 2018 to test and update the previous resource model. Core from the program is also being used for geotechnical and metallurgical test work/studies.

A summary of results from 18CADD005 drilled at the Bindi Hinge zone (part of the Bindi deposit) are presented in Table 1:

Table 1: Summary of significant intersections returned from 18CADD005 (0.3% Cu cut off)

Hole ID	From	To	Interval (m)	Cu %
18CADD005	48	60	12	0.33
18CADD005	64	98	34	0.55
18CADD005	130	136	6	0.37
18CADD005	150	208	58	0.54
including	182	208	26	0.69
18CADD005	214	222.7*	8.7	0.34

*Hole ended in mineralisation

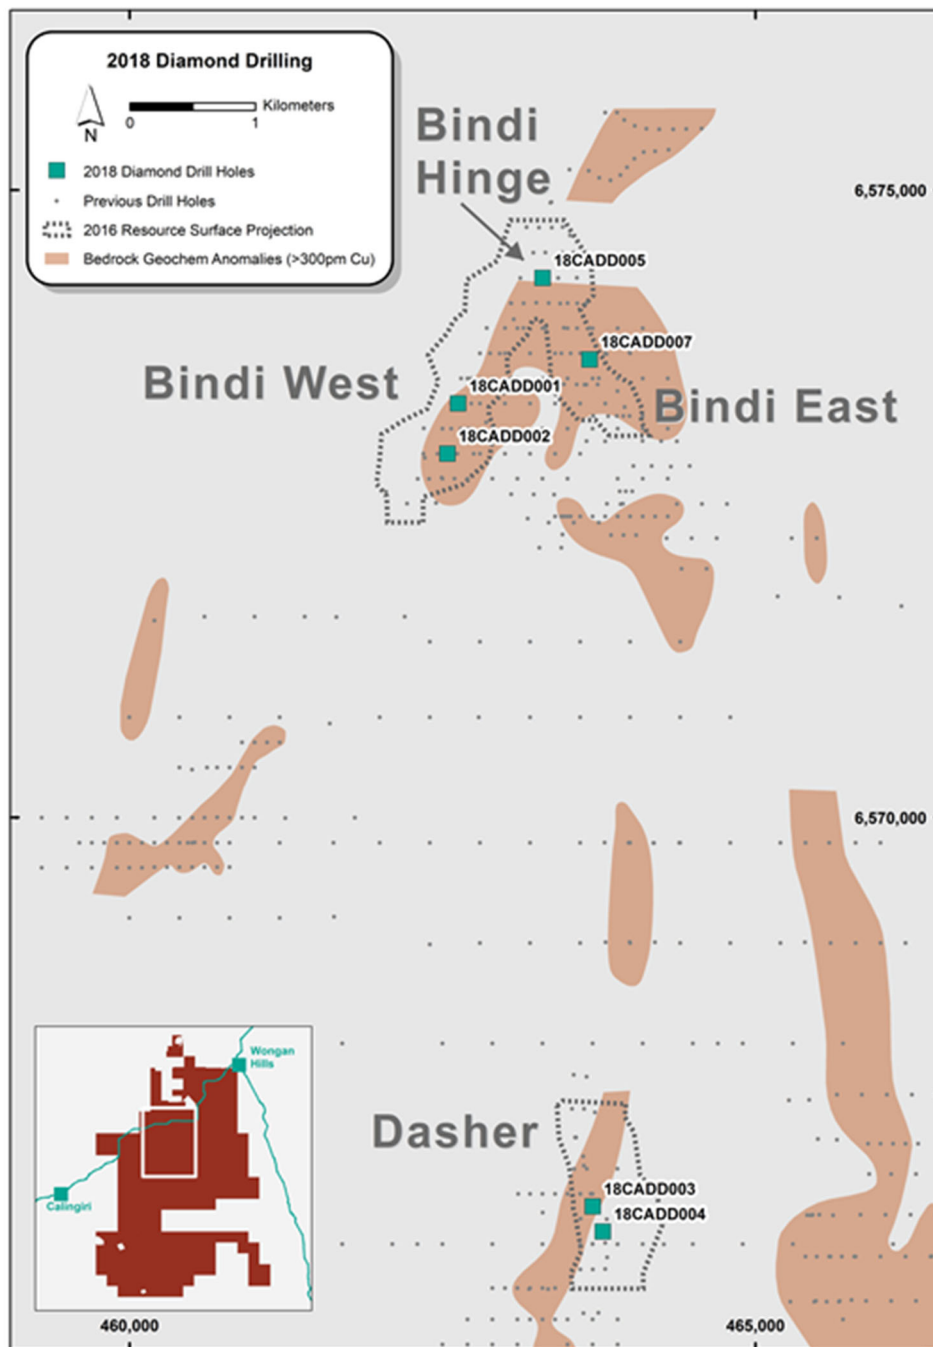


Figure 1: Location of 2018 core drill holes at the Caravel Copper Project

Diamond hole 18CADD005 intersected two significant higher grade zones interpreted to be the upper and lower limbs of an overturned fold (Figure 2). Fabric orientations from the oriented core show the upper limb is dipping approximately 30 degrees to the northwest and the lower limb approximately 40 degrees to the west. In both cases the interpreted dips from core agree well with the position of mineralised zones in adjacent holes, providing good confidence in the interpretation. Mineralisation in both limbs remains open at depth. The good grades and thickness in the lower intersection from 18CADD005 indicates the continuation of a wide ore zone below the previously modelled pit floor, as illustrated in Figure 2, and it is expected the new pit models will extend significantly deeper in this area.

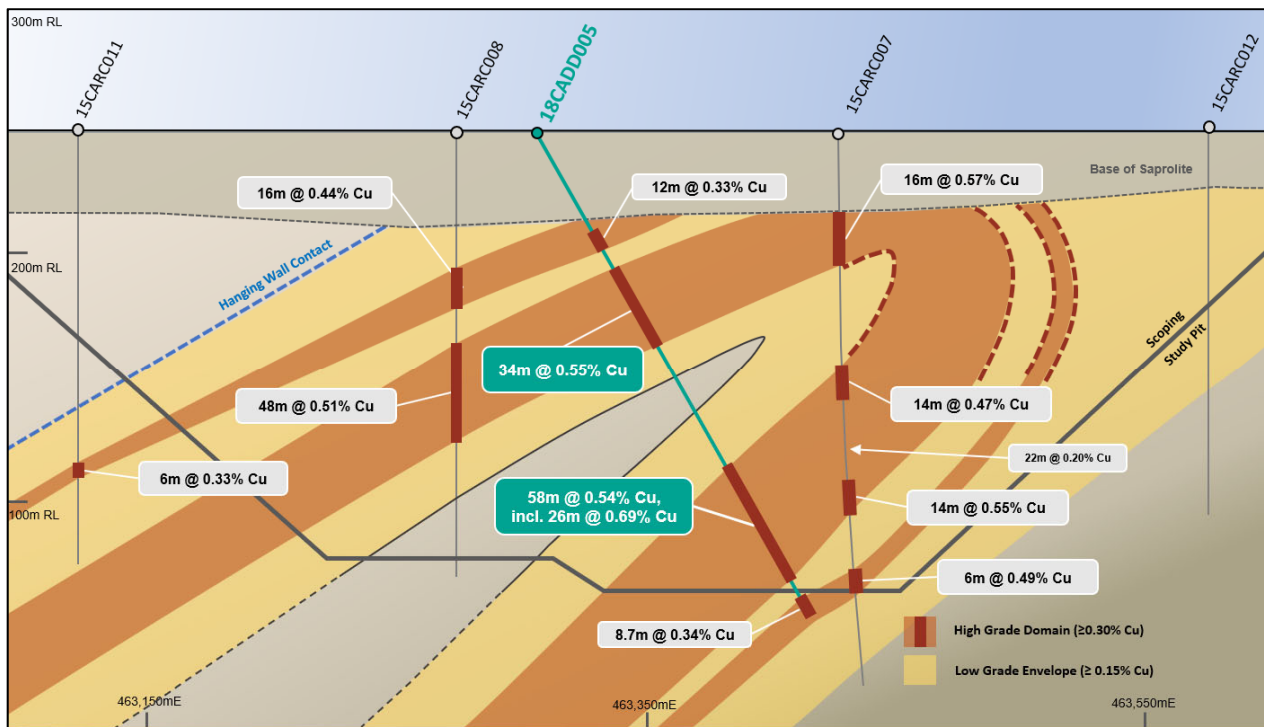


Figure 2: Cross Section through the Bindi Hinge Zone (6574300mN).

The diamond drilling program continues to deliver improved understanding of the structural controls on mineralisation and geological domains. The high grade zones previously identified and confirmed by 18CADD001 and 18CADD002 at Bindi West (see ASX Announcement on 27 November 2018) are interpreted to be the upper limb of the same overturned fold seen in 18CADD005, while Bindi East is interpreted to be the continuation of the steeper west dipping (overturned) limb.

These new results have now confirmed the multi-domain geology model interpretation at Bindi West over a strike distance greater than 1.6km. The extension of this new geology model to the east limb at Bindi has the potential for significant improvements to the current resource model, although the key areas for down dip (west dipping) extensions of the east limb remain untested by drilling. A further programme of work to test this area is being prepared.

A new resource estimate incorporating recent results is scheduled to be completed in early 2019. The new estimate will provide the basis for revised pit designs and mine schedules, which will then be used to assess new project development options. The results to date have improved confidence in the resource, confirmed the existence of higher-grade domains and support the concept for an alternative development model based on initial mining of the higher grade zones.

Drill hole collar details for the 2018 core drilling program are provided in Table 2, while significant intersections for the holes received to date are provided in Table 3. The assay results for two diamond holes completed at the Dasher deposit and one hole completed at Bindi East are expected to be finalised over the next 2 -3 weeks. Results will be released when they become available.

Table 2: Drill hole collar details for 2018 Diamond Drilling Program (MGA Zone 50)

Hole ID	Area	Hole Type	Easting	Northing	Elevation	Depth	Dip	Azimuth
18CADD001	Bindi West	DDH	462538	6572900	251	159.7*	-60	088
18CADD002	Bindi West	DDH	462628	6573300	255	219.7	-60	088
18CADD003	Dasher	DDH	463699	6566900	330	177.7	-60	268
18CADD004	Dasher	DDH	463777	6566700	314	170.1	-62	270
18CADD005	Bindi Hinge	DDH	463305	6574302	256	222.7	-60	081
18CADD006	Bindi East	DDH	463678	6573658	Abandoned			
18CADD007	Bindi East	DDH	463683	6573659	260	100	-60	088

* Hole extended from depth previously reported.

Table 3: Summary of significant intersections from 2018 Diamond Drilling (0.3% Cu cut-off)

Hole ID	From (m)	To (m)	Length (m)	Cu %
18CADD001	44	74	30	0.43
18CADD001*	108	114	6	1.03
18CADD002	102	120	18	0.80
18CADD002	154	180	26	0.47
18CADD002	206	212	6	0.31
18CADD005	48	60	12	0.33
18CADD005	64	98	34	0.55
18CADD005	130	136	6	0.37
18CADD005	150	208	58	0.54
18CADD005	214	222.7	8.7	0.34

* Hole extended from 114m to 159.7m.

For and on behalf of the board

For further information, please contact:

Caravel Minerals Limited
 Suite 1, 245 Churchill Avenue, Subiaco WA 6010
 Telephone: 08 9426 6400

COMPETENT PERSON'S STATEMENT

The information in this report that relates to Exploration Results is based on and fairly represents information and supporting documentation prepared by Mr Peter Pring (a full-time employee and shareholder of Caravel Minerals Limited), and Mr Andrew McDonald (consultant to Caravel Minerals Limited). Mr Pring, Member of AusIMM, and Mr McDonald, Member of the Australian Institute of Geoscientists, have sufficient experience of relevance to the styles of mineralisation and types of deposits under consideration and to the activities undertaken to qualify as Competent Persons as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Pring and Mr McDonald consent to the inclusion in this report of the matters based on their information in the form and context in which they appear.

The information in this report that relates to the Calingiri Mineral Resource estimates is extracted from an ASX Announcement dated 4 April 2016 (see ASX Announcement 4 April 2016 "Calingiri Maiden JORC Resource", www.caravelminerals.com.au and www.asx.com.au). The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and that all material assumptions and technical parameters underpinning the Mineral Resource estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are represented have not been materially modified from the original market announcement.

APPENDIX 1 - JORC Compliance Table

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	Drill holes were sampled via conventional Reverse Circulation (RC) or Diamond drilling (DD).
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	Sampling was carried out under Caravel's standard protocols and QAQC procedures and is considered standard industry practice.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	Reverse Circulation drilling was used to obtain 1m samples. ~3kg samples were combined to form 2m composite samples for assay. Samples are riffle split to 3.2kg and pulverised to nominal 85% passing 75 microns and sent for assay. Reverse Circulation samples were weighed, dried and pulverized to 85% passing 75 microns to form a sub-sample. All RC samples were sampled on 2m composites and sent for a multi-element suite using multi-acid (4 acid) digestion with an ICP/OES and/or MS finish and selected samples for 50g Fire Assay for gold with an AAS finish. HQ3 diamond core was halved at ALS in Perth. Nominal 2m half core samples were collected at ALS Ammtec, where the entire 2m sample was control crushed using a jaw, followed by a cone crusher. A 500g split was collected from the entire crushed sample and submitted to ALS Geochemistry in Perth where samples were weighed and pulverized to 85% passing 75 microns to form a sub-sample. A multi-element suite was completed using multi-acid (4 acid) digestion with an ICP-OES/MS finish and 50g Fire Assay for gold with an AAS finish.
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	RC (reverse circulation) drilling was used using a 5 to 5.5 inch face sampling hammer. Diamond drilling was by conventional HQ techniques. HQ triple tube was used in more weathered zones. Core was oriented using a reflex ACT 3 instrument.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	RC sample recoveries remained relatively consistent throughout the program and are estimated to be

Criteria	JORC Code explanation	Commentary
		100% for 95% of drilling. Any poor (low) recovery intervals were logged and entered into the database. Diamond recoveries in fresh rock approximated 100%.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	The RC rotating cone splitter and or riffle splitter was routinely cleaned and inspected during drilling. Care was taken to ensure calico samples were of consistent volume. Diamond samples were cut on the same core side to improve assay representivity.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	There is negligible to no relationship observed between grade and recovery.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	RC and DD holes were logged geotechnically and geologically including but not limited to weathering, regolith, lithology, structure, texture, alteration, mineralisation and magnetic susceptibility. Logging was at an appropriate quantitative standard to support future geological, engineering and metallurgical studies.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	Logging is considered quantitative in nature.
	<i>The total length and percentage of the relevant intersections logged.</i>	All holes were geologically logged in full.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	All core is half cut and sampled. Duplicate samples were collected by ALS Geochem by splitting the 500g crushed sample submitted for analysis in two and analysing each sample separately. 1 meter RC samples were split off the drill rig into 1 calico bag using a rotating cone or riffle splitter. For each two meter interval, the 1m split samples were fully combined to make one 2m composite. >95% of the samples were dry in nature. Reverse Circulation samples were weighed, dried, pulverized to 85% passing 75 microns. This is considered industry standard and appropriate. Diamond Drilling samples were weighed and pulverized to 85% passing 75 microns to form the sub-sample.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Caravel has its own internal QAQC procedure involving the use of certified reference materials (standards), blanks and duplicates which accounts for 6% of the total submitted samples. QAQC has been checked with no apparent issues.

Criteria	JORC Code explanation	Commentary
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Field duplicate data suggests there is general consistency in the drilling results. The mineralisation does not appear to be 'nuggety' in nature.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	The sample sizes are considered to be appropriate for the style of base and precious metal mineralisation observed which is typically coarse grained disseminated copper and molybdenum.
<i>Quality of assay data and laboratory tests</i>	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	All RC samples were sent for multi-element analysis via multi (4) acid digestion, ICP Atomic Emission Spectrometry (ICP-OES) and/or Mass Spectrometry and selected samples for 50g Fire Assay for gold. All DD samples were sent for multi-element analysis via multi (4) acid digestion, ICP Atomic Emission Spectrometry (ICP-OES) and Mass Spectrometry (MS) and 50g FA/AAS for gold. These techniques are considered appropriate and are considered industry best standard. All assay results are considered reliable and total.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No such instruments have been used for reported intersections.
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	Caravel has its own internal QAQC procedure involving the use of certified reference materials (standards), blanks and duplicates which accounts for 6% of the total submitted samples. The certified reference materials used had a representative range of values typical of low, moderate and high grade copper mineralisation. Standard results for drilling demonstrated assay values are both accurate and precise. Blank results demonstrate there is negligible cross-contamination between samples. Duplicate results suggest there is reasonable repeatability between samples.
<i>Verification of sampling and assaying</i>	<i>The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes.</i>	No twin holes have yet been drilled for comparative purposes. The diamond holes reported were drilled between two RC holes and intersected mineralisation that compares well with the widths and grades intersected in the RC drilling.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Primary data was collected via digital logging hardware using in house logging methodology and codes. The data was sent to the Perth based office where the data is validated and

Criteria	JORC Code explanation	Commentary
		entered into an industry standard master database by Caravel's database administrator.
	<i>Discuss any adjustment to assay data.</i>	There has been no adjustment to assay data.
<i>Location of data points</i>	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Hole collar locations have been picked up by Caravel employees whilst in the field using a GPS accurate to within \pm 3m. Easting and Northing coordinates are considered reliable (\pm 3m). Downhole surveys on all angled RC and DD holes used single shot or multishot readings at downhole intervals at approximately every 30m.
	<i>Specification of the grid system used.</i>	The grid system used for location of all drill holes as shown on all figures is MGA Zone 50, GDA94.
	<i>Quality and adequacy of topographic control.</i>	RL data is considered unreliable at present although topography around the drill areas is relatively flat and hence should not have any considerable effect on the current interpretation of data.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i>	Drill hole spacing is variable. 2m (RC) drill composite samples were sent for elemental analysis. DD samples were sampled nominally at 1m intervals and between 0.3 and 1.3 mtrs dictated by geological boundaries.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Drill and sample spacing is considered sufficient as to make geological and grade continuity assumptions.
	<i>Whether sample compositing has been applied.</i>	2 meter sample compositing (i.e. from two 1 meter samples) of the RC drilling was used.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	The orientation of drilling and sampling is not considered to have any significant biasing effects. The majority of drill holes have been completed perpendicular or oblique to the interpreted mineralised systems.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	As above
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	Chain of custody is managed by Caravel. Sampling is carried out by Caravel's experienced field staff. Samples are stored on site and transported to the Perth laboratory by Caravel's employees.
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	No review has been carried out to date.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	The results relate to 70/2788.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	All applicable tenements are held securely by Caravel with no impediments identified.
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	N/A
<i>Geology</i>	<i>Deposit type, geological setting and style of mineralisation.</i>	The mineralisation at all prospects is believed to be of porphyry and/or skarn deposit style which occurs within a possible larger scale Archean subduction related geological setting.
<i>Drill hole Information</i>	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes, including Easting and northing of the drill hole collar, Elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar, dip and azimuth of the hole, down hole length and interception depth plus hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	Refer to Tables in announcement above. See representative drill collar plans and cross-section.
<i>Data aggregation methods</i>	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	Length weighted averages used for exploration results. Cutting of high grades was not applied in the reporting of intercepts.

Criteria	JORC Code explanation	Commentary
<i>Relationship between mineralisation widths and intercept lengths</i>	<i>These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	Downhole lengths are reported in this announcement. Diamond holes reported in this announcement were drilled approximately perpendicular to the interpreted mineralised system and downhole widths are interpreted to approximate true widths.
<i>Diagrams</i>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Refer to Figures included in the release.
<i>Balanced reporting</i>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All significant results are reported with no intended bias.
<i>Other substantive exploration data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	Multi-element assaying was conducted on all samples which include potentially deleterious elements including arsenic.
<i>Further work</i>	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Further drilling and geological evaluations are in progress to infill, potentially extend and further understand the Bindi and Dasher deposits, in particular the geological continuity and modelling of higher and lower grade zones within the mineralised systems. Collection of geotechnical data and sample material for metallurgical test-work is also part of the drilling program.